


# recon Series

## Value for Money

Available in various power fitted with efficient LEDs from international brand Philips and Powered by Done driver, our Recon series LED Flood Lights offer the users not only superior Quality of lighting exteriors, but also a supreme Reliability. With the optical lens and uniform photometric distribution, this LED lighting series achieves high optical efficiency.

Thanks to a robust aluminium housing with safety glass cover, the floodlights are ideal for outdoor flood lighting applications, such as wall mounted around building facades, buildings as well as lighting gardens, paths near to buildings, garages, and entrance ways.

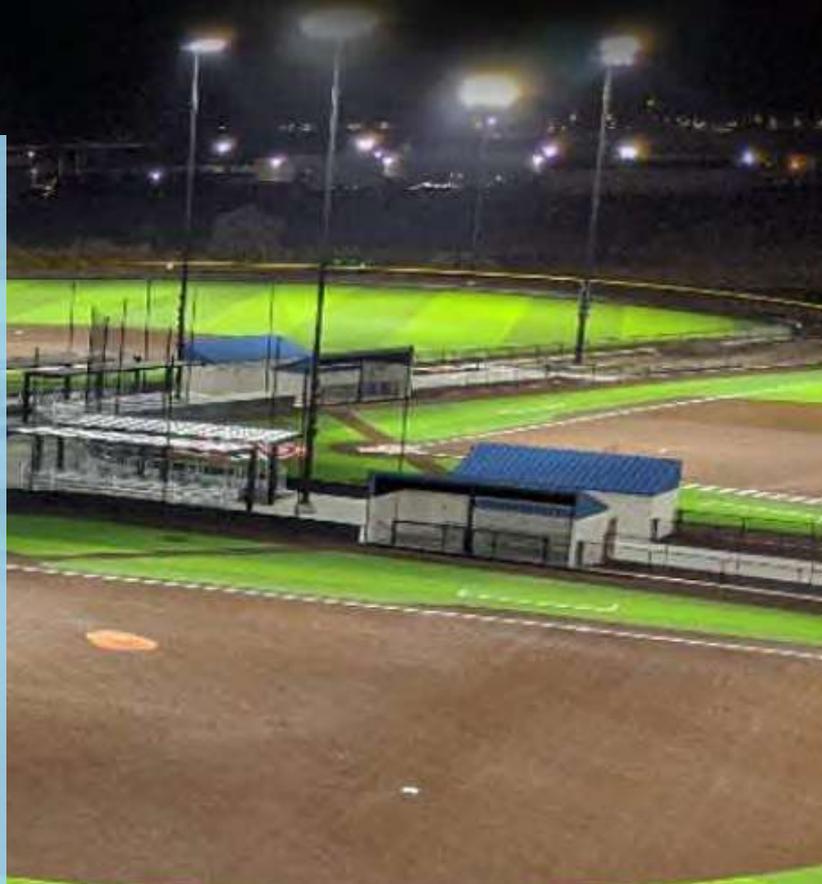

**150**  
lm/w

- High performance with efficiency up to 150 lm/W
- L80/B10 @25C° 35,000H lifetime
- SDCM<6
- PF >0,9
- THD < 15%
- Nominal Voltage: 100-277V
- Insulation Class I





- Robust aluminum die-cast
- High protection rating IP66
- High impact resistance of Ik08
- Suitable for operation in ambient temperature of -25°C to +45°C
- Static built-in driver

Driver  
**DONE**

Chip  
**PHILIPS**



• Beam angle: 120° & 90°



# P

lug-In  
Sensor



**Standard  
Flood light**



**10 secs**



**Sensor  
Flood Light**

## More Than Good



**Philips LED**



**DONE Driver**




**Die-Cast Heatsink**



## Features


Housing: Die-cast Aluminum ADC12  
 Thermal Conductivity: 96 W/m·K  
 Led: Philips  
 CRI: Ra>70 ( 80/90 for option)  
 SDCM: <6  
 Power Factor: >0.5/0.9  
 THD: <15  
 Driver: Done  
 Driver Efficiency: >90%  
 Protection: OTP, OCP, OVP, SCP  
 Surge Protection: 1~6KV  
 Waterproof: IP66  
 Impact Test: IK08  
 Electrical: 100-277V, 50/60Hz  
 Operating Temperature: -25~45 °C  
 Tm21: L80B10>35,000H  
 Lifetime: 35,000H

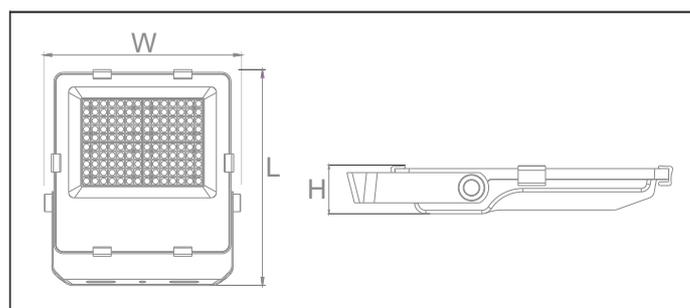

## Functions

Micro-wave · PIR


## Optical options:

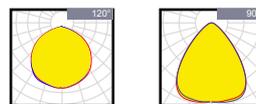

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
FL010RECH-PD	10W	100~277V	1500LM	>70(80)	IP66	L232*W204*H53MM
FL020RECH-PD	20W	100~277V	3000LM	>70(80)	IP66	L232*W204*H53MM
FL030RECH-PD	30W	100~277V	4500LM	>70(80)	IP66	L232*W204*H53MM
FL050RECH-PD	50W	100~277V	7500LM	>70(80)	IP66	L280*W243*H53MM

## Plug-in Sensor

With connectors on the standard floodlight, the sensor can be plugged into the fixture very easily, to realize Micro-wave or PIR sensor function. The female and male connectors are specially made to get waterproof IP65.

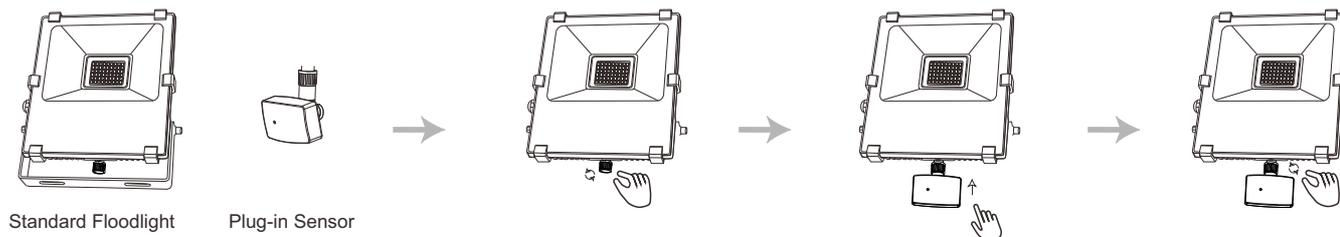


Standard Floodlight

Plug-in Sensor



1

With sufficient light, the lamp doesn't switch on.

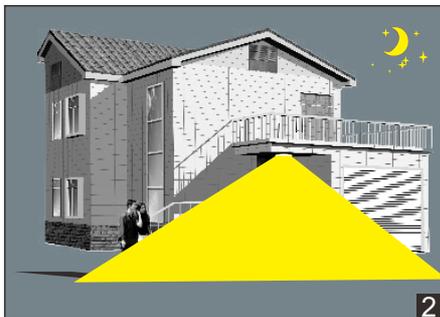

2

With insufficient ambient light, the sensor switches on the lamp when motion is detected.




3

After hold time, the sensor switches off the lamp when no motion is detected.

## Micro-wave


Power Sourcing: 220V/AC-240V/AC	Detection Range: 180°
Power Frequency: 50Hz	Detection Distance: 2-12m (radius) adjustable
Ambient Light: 3-2000LUX (Adjustable)	HF System: 5.8GHz CW radar, ISM band
Time-Delay: Min.:10sec±3sec Max.:15min±2min	Transmission Power: <10mW
Power Consumption: 0.9W	Installing Height: 1.5m~3.5m
Rated Load: 300Wmax	Detection Motion Speed: 0.6~1.5m/s

## Setting



### SENS Adjustment

SENS Knob controls the sensitivity, the detection area  
Turn the sensor SENS knob counter-clockwise to decrease the sensitivity to lowest level=within 2m, and to the highest level=within 12meters




### TIME Adjustment

LUX knob determines how long the floodlight will stay on after the last motion has been detected  
Turn the sensor TIME knob counter-clockwise to decrease the time to 10 sec.  
Turn the sensor TIME knob counter-clockwise to increase the time to 15 min.




### LUX Adjustment

LUX knob determines at what light level the floodlight will start working. It is actually controlled by built-in light sensor  
Turn the sensor LUX knob counter-clockwise to the moon (dusk) setting. In this provisional setting model, the sensor remains inactive during daylight. At dusk when you find it is the desired night level to start work, then simply set it to the position it needs to become operative as daylight declines

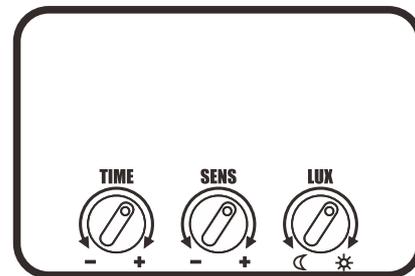


Power Sourcing: 220V/AC-240V/AC	Detection Range: 120°
Power Frequency: 50Hz	Detection Distance: 2-10m (<24°C) (adjustable)
Ambient Light: 3-2000LUX (Adjustable)	HF System: 5.8GHz CW radar, ISM band
Time-Delay: Min.:10sec±3sec Max.:7min±2min	Transmission Power: <10mW
Power Consumption: 0.9W	Installation Height: 1.8m~2.5m
Rated Load: 200Wmax	Detection Motion Speed: 0.6~1.5m/s
Working Humidity: <93%RH	Working Temperature: -20~+40 °C

## Setting



### SENS Adjustment

SENS Knob controls the sensitivity, the detection area  
Turn the sensor SENS knob counter-clockwise to decrease the sensitivity to lowest level=within 2m, and to the highest level=within 10meters




### TIME Adjustment

LUX knob determines how long the floodlight will stay on after the last motion has been detected  
Turn the sensor TIME knob counter-clockwise to decrease the time to 10 sec.  
Turn the sensor TIME knob counter-clockwise to increase the time to 7 min.



### LUX Adjustment

LUX knob determines at what light level the floodlight will start working. It is actually controlled by built-in light sensor  
Turn the sensor LUX knob counter-clockwise to the moon(dusk) setting. In this provisional setting model, the sensor remains inactive during daylight. At dusk when you find it is the desired night level to start work, then simply set it to the position it needs to become operative as daylight declines

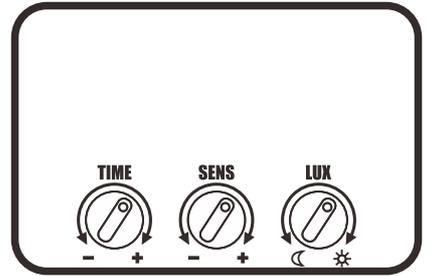


## Note

### **PROBLEMS AND SOLVED WAY :**

- ✂ The load do not work:
  - a. please check if the connection-wiring of power and load is correct.
  - b. please check if the load is good.
  - c. please check if the working light set correspond to ambient light.
- ✂ The sensitivity is poor:
  - a. Please check if there has hinder in front of the detection window to effect to receive the signal.
  - b. Please check if the ambient temperature is too high.
  - c. Please check if the induction signal source is in the detection fields.
  - d. Please check if the installation height corresponds to the height showed in the instruction.
  - e. Please check if the moving orientation is correct.
- ✂ The sensor can not shut off the load automatically:
  - a. Please check if there is continual signal in the detection field.
  - b. Please check if the time delay is the longest.
  - c. Please check if the power corresponds to the instruction.
- d. Please check if the temperature near the sensor changes obviously, such as air condition or central heating etc.

# Packing

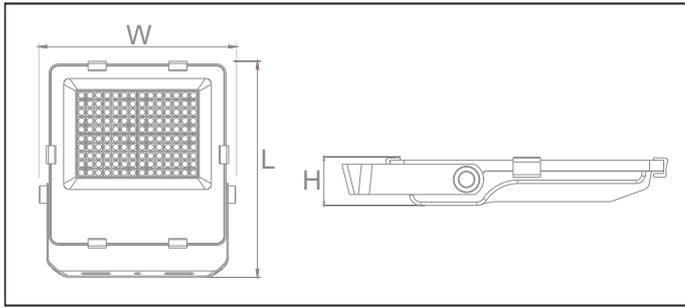

Model	Inner Carton(mm)			QTY / CTN	Outer Carton(mm)			QTY / CTN	NW/CTN	GW/CTN
FL010RECH	245	220	60	1	320	260	240	5	6.15	6.65
FL020RECH	245	220	60	1	320	260	240	5	6.15	6.65
FL030RECH	245	220	60	1	320	260	240	5	6.15	6.65
FL050RECH	290	260	60	1	320	310	280	5	7.90	8.90